


## YSLY 300/500 V PVC Control Cable

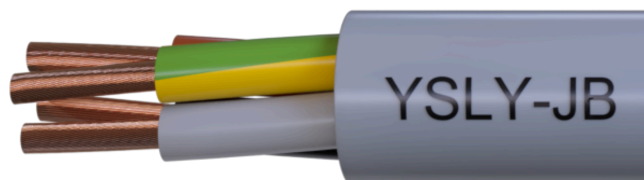

### Application

In dry and damp locations for low and medium-level mechanical stress, but not in the open-air. To be used as a termination and connection cable in the control, measuring and signal technology. Suitable as a signal and impulse cable for control and inspection of industrial plants, production lines and machinery.

### Construction

Conductor material	Copper: Class 5 fine stranded according to EN 60228
Insulation	Polyvinylchloride (PVC)
Outer sheath	Polyvinylchloride (PVC), Grey

### Standards and Certifications

DIN VDE 0281 ; DIN EN 60228 class 5 (construction)

### Core Identification

**JZ:** One core green/yellow, other cores are black with figures

**OZ:** Every core is black with figures

**JB:** Colours accordance with HD 308 standard with green yellow

**OB:** Colours accordance with HD 308 standard without green yellow

### Fire classification CPR class

Reaction to fire EN 60332-1-2 - Eca

### YSLY 300/500V - PVC Control Cable

Technical data, dimensions and weights are subject to change. All sizes and values without tolerances are reference values. Specifications are for products supplied by NRG Cables: any modification or alteration of products may give different results. The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of NRG Cables. The information is correct to the best of our knowledge at the time of publication. NRG Cables reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorized by NRG Cables. © All rights reserved by NRG Cables • [www.nrgcables.com](http://www.nrgcables.com)

## Technical Data

Nominal voltage $U_0/U$	[V]	300 / 500 V
Test voltage	[V]AC	2000
Temperature range	in motion °C	-5°C till +70°C
	fixed °C	-30°C till +70°C
Operating temperature	short circuit °C	150°C
Short circuit time	max. [sec]	5
Bending radius	one time/fixed x diameter	6
	in motion x diameter	15

Number of cores x Cross- section	Overall diameter (approx.) [mm]	Weight (approx.) [kg/km]	Maximum electrical resistance at 20° C [Ω/km]
2 x 0.5	5.3	39	39
3 x 0.5	5.7	47	39
4 x 0.5	6.2	58	39
5 x 0.5	6.8	73	39
6 x 0.5	7.3	88	39
7 x 0.5	7.3	97	39
8 x 0.5	8.4	121	39
9 x 0.5	9.1	134	39
10 x 0.5	9.3	146	39
11 x 0.5	9.7	153	39
12 x 0.5	9.7	164	39
13 x 0.5	10.5	175	39
14 x 0.5	10.5	188	39
15 x 0.5	11	194	39
16 x 0.5	11	206	39
17 x 0.5	11.5	221	39
18 x 0.5	11.7	226	39
19 x 0.5	11.5	239	39

### YSLY 300/500V - PVC Control Cable

Technical data, dimensions and weights are subject to change. All sizes and values without tolerances are reference values. Specifications are for products supplied by NRG Cables: any modification or alteration of products may give different results. The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of NRG Cables. The information is correct to the best of our knowledge at the time of publication. NRG Cables reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorized by NRG Cables. © All rights reserved by NRG Cables • [www.nrgcables.com](http://www.nrgcables.com)

Number of cores x Cross- section	Overall diameter (approx.) [mm]	Weight (approx.) [kg/km]	Maximum electrical resistance at 20° C [Ω/km]
20 x 0.5	12.2	252	39
21 x 0.5	12.4	262	39
24 x 0.5	13.3	292	39
25 x 0.5	14.1	314	39
26 x 0.5	14.1	326	39
27 x 0.5	14.1	343	39
30 x 0.5	14.7	360	39
32 x 0.5	15.3	388	39
34 x 0.5	15.4	401	39
36 x 0.5	15.5	414	39
37 x 0.5	15.5	432	39
2 x 0.75	5.7	48	26
3 x 0.75	6.1	58	26
4 x 0.75	6.8	74	26
5 x 0.75	7.4	92	26
6 x 0.75	7.9	83	26
7 x 0.75	7.9	111	26
8 x 0.75	9.1	153	26
9 x 0.75	10.5	179	26
10 x 0.75	10.5	187	26
11 x 0.75	10.9	198	26
12 x 0.75	10.9	211	26
13 x 0.75	11.4	222	26
14 x 0.75	11.4	223	26
15 x 0.75	11.8	243	26
16 x 0.75	12.2	258	26
17 x 0.75	12.5	283	26
18 x 0.75	12.9	295	26
19 x 0.75	12.9	316	26
20 x 0.75	13.7	335	26

#### YSLY 300/500V - PVC Control Cable

Technical data, dimensions and weights are subject to change. All sizes and values without tolerances are reference values. Specifications are for products supplied by NRG Cables: any modification or alteration of products may give different results. The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of NRG Cables. The information is correct to the best of our knowledge at the time of publication. NRG Cables reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorized by NRG Cables. © All rights reserved by NRG Cables • [www.nrgcables.com](http://www.nrgcables.com)

Number of cores x Cross- section	Overall diameter (approx.) [mm]	Weight (approx.) [kg/km]	Maximum electrical resistance at 20° C [Ω/km]
21 x 0.75	13.7	341	26
24 x 0.75	14.9	360	26
25 x 0.75	15.5	396	26
26 x 0.75	15.3	416	26
27 x 0.75	15.3	430	26
30 x 0.75	16.2	466	26
32 x 0.75	16.8	505	26
34 x 0.75	17.5	527	26
36 x 0.75	17.3	539	26
37 x 0.75	17.3	553	26
2 x 1	6.1	57	19.5
3 x 1	6.6	70	19.5
4 x 1	7.3	90	19.5
5 x 1	7.9	111	19.5
6 x 1	8.7	138	19.5
7 x 1	8.7	140	19.5
8 x 1	10.1	192	19.5
9 x 1	11.3	216	19.5
10 x 1	11.3	229	19.5
11 x 1	11.7	241	19.5
12 x 1	11.8	259	19.5
13 x 1	12.3	271	19.5
14 x 1	12.5	278	19.5
15 x 1	12.5	301	19.5
16 x 1	13.3	322	19.5
17 x 1	13.5	346	19.5
18 x 1	13.9	360	19.5
19 x 1	13.9	389	19.5
20 x 1	14.9	416	19.5
21 x 1	14.9	443	19.5

#### YSLY 300/500V - PVC Control Cable

Technical data, dimensions and weights are subject to change. All sizes and values without tolerances are reference values. Specifications are for products supplied by NRG Cables: any modification or alteration of products may give different results. The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of NRG Cables. The information is correct to the best of our knowledge at the time of publication. NRG Cables reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorized by NRG Cables. © All rights reserved by NRG Cables • [www.nrgcables.com](http://www.nrgcables.com)

Number of cores x Cross- section	Overall diameter (approx.) [mm]	Weight (approx.) [kg/km]	Maximum electrical resistance at 20° C [Ω/km]
24 x 1	16.5	491	19.5
25 x 1	16.9	524	19.5
30 x 1	17.7	579	19.5
32 x 1	18.4	627	19.5
34 x 1	19.1	677	19.5
36 x 1	19.1	696	19.5
37 x 1	19.1	724	19.5
2 x 1.5	6.7	72	13.3
3 x 1.5	7.2	89	13.3
4 x 1.5	7.8	111	13.3
5 x 1.5	8.6	141	13.3
6 x 1.5	9.5	174	13.3
7 x 1.5	9.5	196	13.3
8 x 1.5	10.9	234	13.3
9 x 1.5	12.1	266	13.3
10 x 1.5	12.1	286	13.3
11 x 1.5	12.5	300	13.3
12 x 1.5	13.0	315	13.3
14 x 1.5	13.6	355	13.3
16 x 1.5	14.4	408	13.3
18 x 1.5	15.1	458	13.3
19 x 1.5	15.1	491	13.3
20 x 1.5	16.2	526	13.3
21 x 1.5	16.2	576	13.3
25 x 1.5	18.4	666	13.3
26 x 1.5	18.6	684	13.3
30 x 1.5	19.2	742	13.3
32 x 1.5	20.2	811	13.3
34 x 1.5	21.0	864	13.3
36 x 1.5	21.0	888	13.3

#### YSLY 300/500V - PVC Control Cable

Technical data, dimensions and weights are subject to change. All sizes and values without tolerances are reference values. Specifications are for products supplied by NRG Cables: any modification or alteration of products may give different results. The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of NRG Cables. The information is correct to the best of our knowledge at the time of publication. NRG Cables reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorized by NRG Cables. © All rights reserved by NRG Cables • [www.nrgcables.com](http://www.nrgcables.com)

Number of cores x Cross- section	Overall diameter (approx.) [mm]	Weight (approx.) [kg/km]	Maximum electrical resistance at 20° C [Ω/km]
2 x 2.5	8.2	112	7.98
3 x 2.5	8.8	141	7.98
4 x 2.5	9.7	177	7.98
5 x 2.5	10.7	220	7.98
6 x 2.5	11.7	265	7.98
7 x 2.5	11.7	299	7.98
8 x 2.5	13.3	370	7.98
9 x 2.5	15.3	437	7.98
10 x 2.5	15.3	454	7.98
11 x 2.5	15.3	473	7.98
12 x 2.5	#364160 15.9	512	7.98
14 x 2.5	16.6	563	7.98
16 x 2.5	17.7	641	7.98
18 x 2.5	18.7	733	7.98
20 x 2.5	19.8	831	7.98
21 x 2.5	19.8	941	7.98
25 x 2.5	22.9	1059	7.98
30 x 2.5	23.8	1175	7.98
32 x 2.5	24.9	1281	7.98
34 x 2.5	25.7	1367	7.98
36 x 2.5	25.7	1408	7.98
2 x 4	9.3	156	4.95
3 x 4	9.9	197	4.95
4 x 4	11.2	253	4.95
5 x 4	12.4	321	4.95
7 x 4	13.6	408	4.95
12 x 4	18.3	724	4.95
2 x 6	12.5	261	3.30
3 x 6	13.6	336	3.30
4 x 6	14.8	420	3.30

#### YSLY 300/500V - PVC Control Cable

Technical data, dimensions and weights are subject to change. All sizes and values without tolerances are reference values. Specifications are for products supplied by NRG Cables: any modification or alteration of products may give different results. The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of NRG Cables. The information is correct to the best of our knowledge at the time of publication. NRG Cables reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorized by NRG Cables. © All rights reserved by NRG Cables • [www.nrgcables.com](http://www.nrgcables.com)

Number of cores x Cross- section	Overall diameter (approx.) [mm]	Weight (approx.) [kg/km]	Maximum electrical resistance at 20° C [Ω/km]
5 x 6	16.4	537	3.30
7 x 6	18.3	686	3.30
2 x 10	13.6	295	1.91
3 x 10	14.5	365	1.91
4 x 10	17.7	651	1.91
5 x 10	19.6	824	1.91
7 x 10	21.6	1041	1.91
2 x 16	15.0	401	1.21
3 x 16	16.2	515	1.21
4 x 16	21.5	980	1.21
5 x 16	23.9	1256	1.21
7 x 16	26.2	1592	1.21
2 x 25	18.6	625	0.780
3 x 25	20.2	814	0.780
4 x 25	26.4	1511	0.780
5 x 25	29.3	1930	0.780
7 x 25	32.5	2461	0.780
3 x 35	24.9	1245	0.554
4 x 35	31.5	2128	0.554
5 x 35	34.5	2678	0.554
4 x 50	37.1	3014	0.386
5 x 50	41.3	3743	0.386
4 x 70	44.1	4257	0.272
5 x 70	48.3	5230	0.272

#### YSLY 300/500V - PVC Control Cable

Technical data, dimensions and weights are subject to change. All sizes and values without tolerances are reference values. Specifications are for products supplied by NRG Cables: any modification or alteration of products may give different results. The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of NRG Cables. The information is correct to the best of our knowledge at the time of publication. NRG Cables reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorized by NRG Cables. © All rights reserved by NRG Cables • [www.nrgcables.com](http://www.nrgcables.com)